

YUTRAXTM

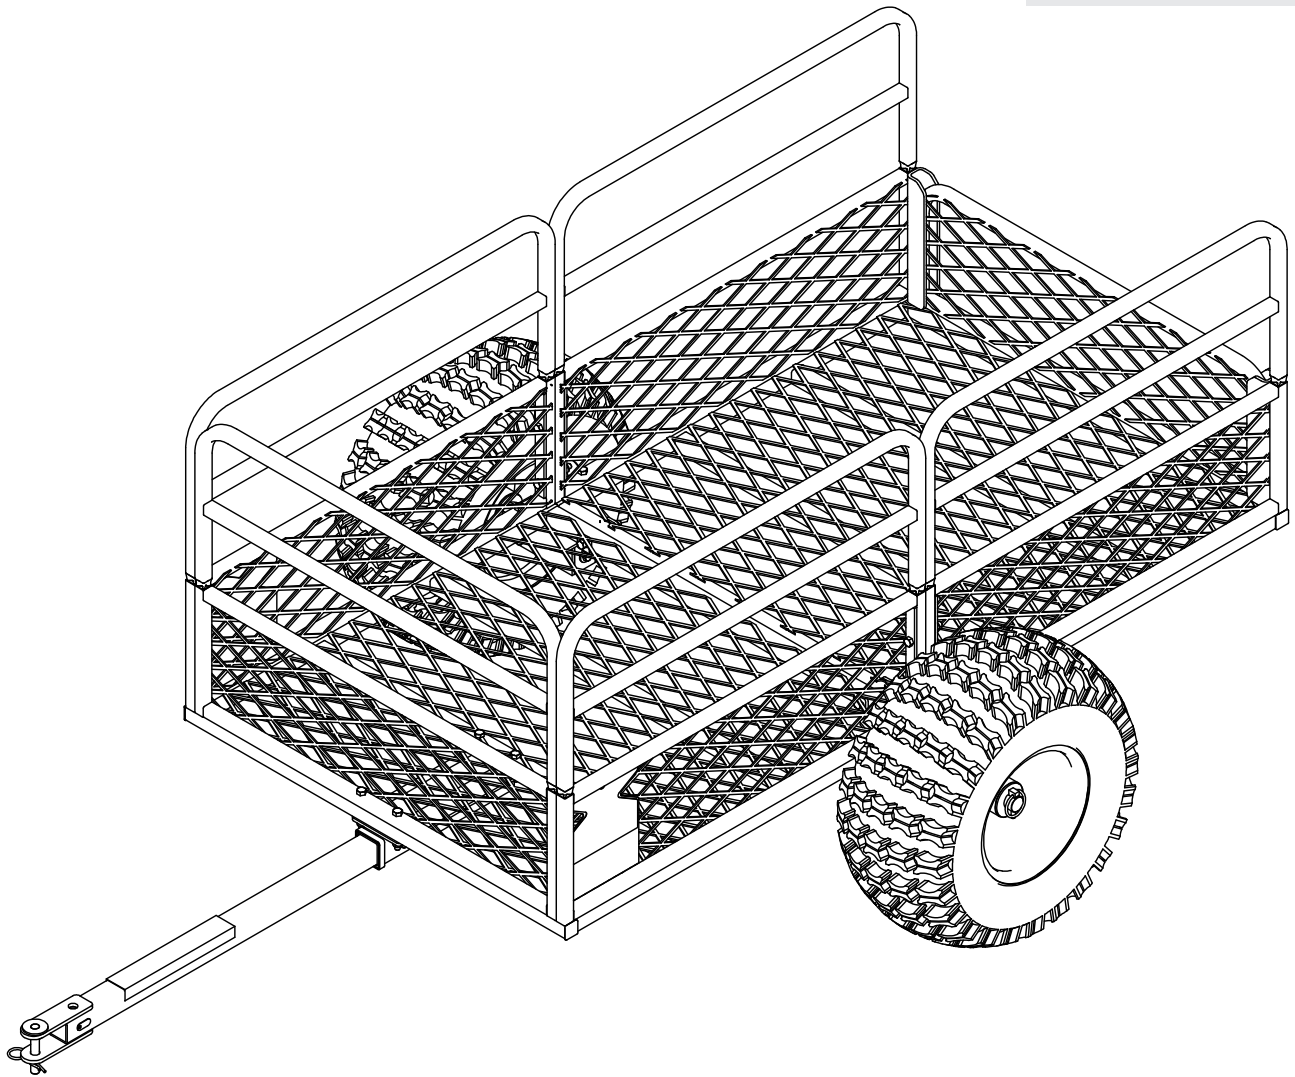


Operator's Manual

HC1500 TRAILER

MODEL TX162

**Maximum Field Rating
1500 lb.**



Get parts online at
www.yutrax.com

© 2020 Ardisam, Inc.
All Rights Reserved

P/N: 36541
C/N: 36394
REV1: 07/27/2020

INTRODUCTION

Yutrax™ offers a full line of engineered outdoor gear. We appreciate your purchase of our world class ATV trailer. Follow these few simple instructions and your product will be sure to give you many years of trouble free pleasure. Instructions should be kept in a safe place and reviewed at least annually. .

If for any reason you have a problem with your product or are missing any parts, **DO NOT return to the retailer**, contact the Yutrax™ Customer Service Department at 800-345-6007 for assistance.

CONTENTS

Introduction/Warranty	2
Warnings.....	3
Assembly Instructions	4-8
Illustrated Parts Breakdown.....	9

WARRANTY

Yutrax, a division of Ardisam Incorporated, offers a one year limited warranty to be free from defects in materials and workmanship for the service life of the product, not to exceed twelve consecutive months from the date of purchase. This warranty applies to the original owner with a proof of purchase and is not transferable. This warranty applies only to products which have not been subjected to negligent use, misuse, alteration, accident or if repairs have been made by anyone outside our factory. This warranty supersedes all other warranties either expressed or implied and all other obligations or liabilities on our part. Ardisam, Inc., does not assume, and does not authorize any other person to assume for us, any liability in connection with the sale of our products. Warranty work must be sent directly to Ardisam, Inc. or one of our authorized service centers and performed by them. **To obtain warranty service and/or replacement instructions, you must have prior approval from Ardisam, Inc. before shipping your package to us by calling our customer service department at 800-345-6007 or by writing to: Ardisam, Inc., P.O. Box 666, 1160 Eighth Avenue, Cumberland, WI 54829 for a return material authorization number (RMA#).** All items must be shipped prepaid. Ardisam, Inc. will at no charge, repair or replace, at their discretion, any defective part which falls under the conditions stated above. Ardisam retains the right to change models, specifications and price without notice.

For replacement parts, phone 800-345-6007 or go online to www.yutrax.com.

STOP

READ AND UNDERSTAND THE FOLLOWING WARNINGS BEFORE ASSEMBLY

MODEL TX162

TOTAL WEIGHT LIMIT - 1500 LB.

WARNING

▲ **READ, UNDERSTAND AND FOLLOW ALL ASSEMBLY, INSPECTION, MAINTENANCE & USE INSTRUCTIONS PROVIDED BEFORE EACH USE. FAILURE TO FOLLOW ALL WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.**

BE SURE TO FOLLOW ALL INSTRUCTIONS PROVIDED. IF ANY INSTRUCTIONS ARE NOT UNDERSTOOD OF IF YOU HAVE PART ISSUES CALL 800-345-6007 BEFORE USING.

DOUBLE CHECK ASSEMBLY STEPS TO BE CERTAIN YOU HAVE CORRECTLY ASSEMBLED THIS PRODUCT.





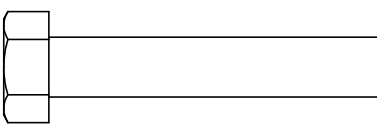
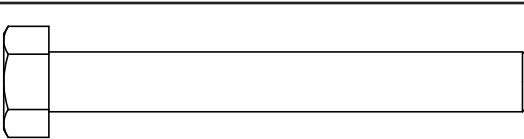
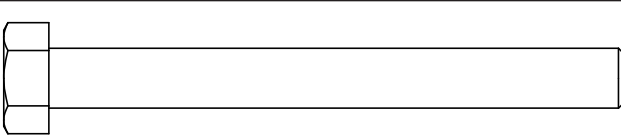

WARNING

- ▲ This product carries strict weight restrictions. **Do Not** use this product if you exceed the total weight limit.
- ▲ Stopping distance increases with speed and weight of towed load. Travel slowly and allow extra time and distance to stop.
- ▲ Total towed weight must not exceed limits specified in towing vehicle operator's manual.


WARNING

- ▲ **Always** use as an ATV trailer only.
- ▲ **Never** tow behind vehicle on a highway. For off-road use only!
- ▲ **Always** follow the manufacturer's recommendations for weight limits for towed equipment and towing on slopes. Excessive towed load can cause loss of traction and loss control on slopes. Reduce towed weight when operating on slopes.
- ▲ **Never** shift to neutral and coast downhill.
- ▲ **Never** drive in excess of 10 MPH while using this product.
- ▲ **Always** use only approved hitches. Tow only with a machine that has a hitch designed for towing. Do not attach towed equipment except at the approved hitch point.
- ▲ **Never** turn sharply. Use additional caution when turning or operating under adverse surface conditions. Use care when reversing.
- ▲ **Always** inspect before each & every use to be sure there is no product damage or loose/missing bolts or hardware. Over time, nuts and bolts may become loose from vibration.
- ▲ **Be sure** to always have the correct amount of air pressure in tires. This will help deter from unnecessary wear and/or damage. Air pressure can be found on side wall of tire.
- ▲ **Always** be sure lock pins are latched to prevent accidental removal.
- ▲ **Never** use a damaged ATV trailer.
- ▲ **Always** keep bystanders away when you operate a towed attachment.
- ▲ **Always** before you back machine and attachment, look carefully behind attachment for bystanders.
- ▲ **Never** allow people or animals to ride in the ATV trailer! It is not designed for that matter.
- ▲ **Never** use when intoxicated or using over-the-counter medication or prescription drugs.
- ▲ **Never** use carelessly – Think Safety!

HARDWARE LIST

Item	Part No.	Description	Image	Qty
10	# 36535	WASHER STEEL 25 X 45 X 2.40 MM		4
13	# 25033	HITCH PIN		1
14	# 12118	HAIRPIN 1/8 IN		1
15	# 37772	LOCK PIN 6 X 40 MM		2
17	# 8655B	BOLT 5/16 X 1-3/4 IN		2
18	#53730B	BOLT 5/16 X 2-1/2 IN		11
19	# 29010B	BOLT 5/16 X 3 IN		2
20	# 60G5NYB	NUT 5/16 IN		15

TOOLS FOR ASSEMBLY

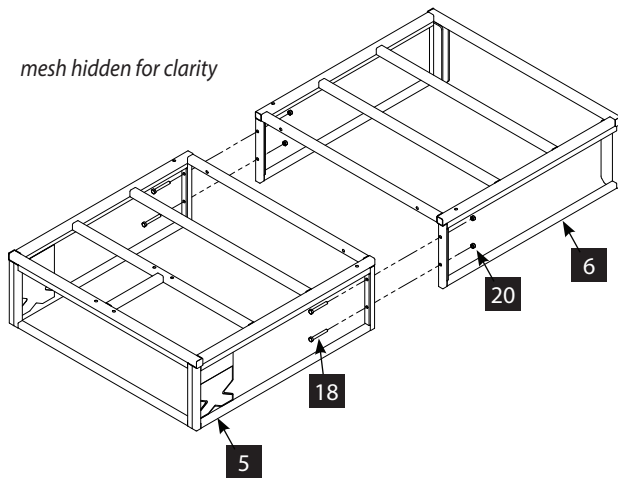
-	-	1/2 IN WRENCH	 1/2	2
---	---	---------------	--	---

ASSEMBLY INSTRUCTIONS

IMPORTANT ASSEMBLY TIP:

Do not tighten any nut and bolt combinations completely until all parts are assembled together! Finger tighten plus one turn of a wrench only! This will temporarily hold the lock-nut on the bolt while helping alignment of all parts! After all parts are assembled together, all nut and bolt combinations must be completely tightened.

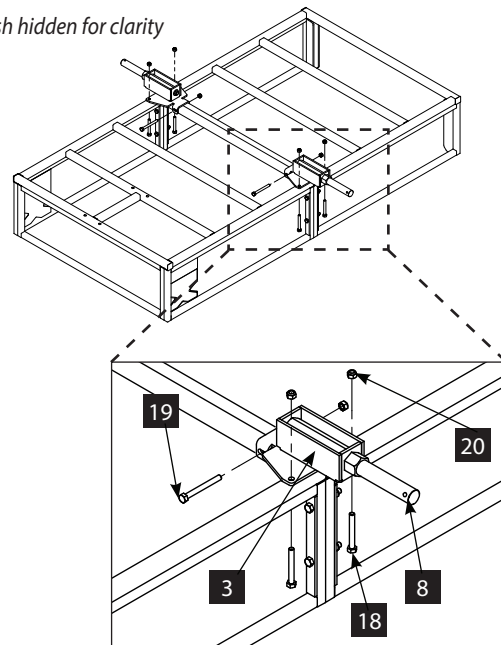
STEP 1



1. Attach front and rear trailer frames (5 & 6) using four 5/16-18 x 2 1/2 IN bolts (18) and nuts (20).

Note: For easier assembly place unit upside down

mesh hidden for clarity

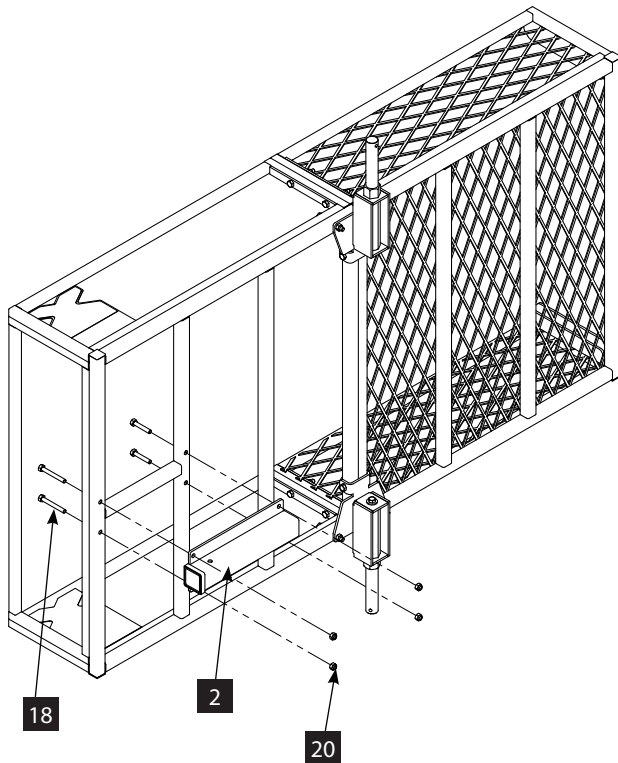


2. Attach each spindle bracket (3) to the bottom of the trailer frames (5 & 6) using two 5/16-18 x 2 1/2 IN bolts (18), one 5/16-18 x 3 IN bolt (19), and three nuts (20).

Note: For easier assembly place unit upside down

STEP 2

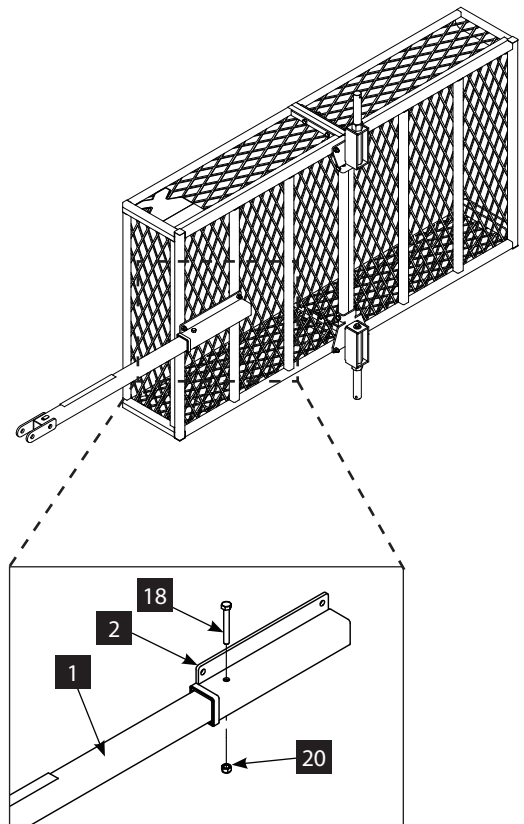
STEP 3



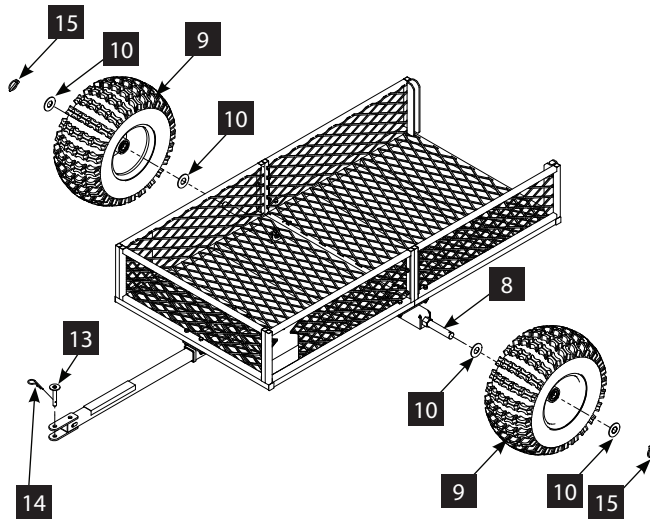
3. Attach the tongue receiver (2) to the front trailer frame (5) using two 5/16-18 x 2 ½ IN bolts (18), two 5/16-18 x 1 ¾ IN bolts (17), and four nuts (20).

Note: Orient tongue receiver so strengthening band faces the front of the trailer.

4. Insert the trailer tongue (1) into end of the tongue receiver (2) and secure using one 5/16-18 x 2 ½ IN bolt (18) and nut (20).

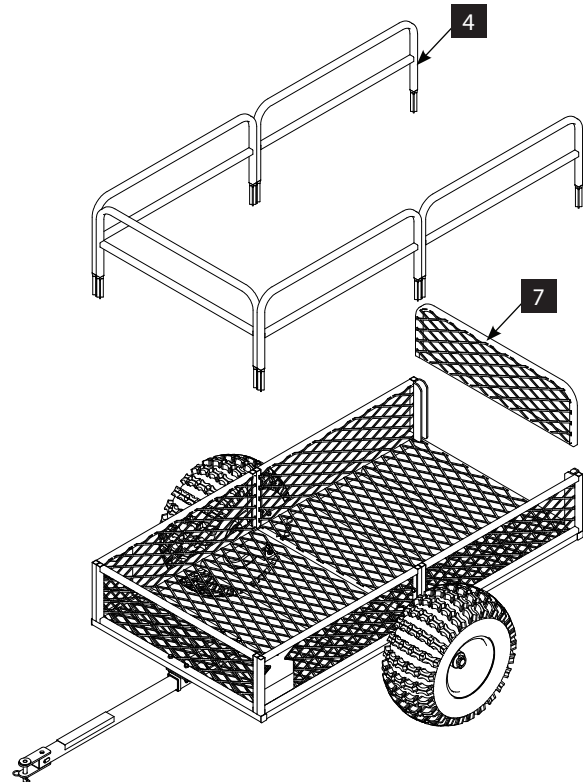


STEP 4

STEP 5-7


5. Tighten all nut and bolt assemblies. Be sure not to over tighten or crush tubing when tightening.
6. Slide assembly wheel/tire (9) onto spindle between two 45MM washers (10) and secure by inserting lock pin 6 x 40MM (15) through the end of the hex spindle (8).
7. Repeat Step 6 for the other side.

8. Slide the removable tailgate (7) into the slots on the rear trailer frame (6). Slide the removable side rails (4) into the top side of the front and rear trailer frames (5 & 6).


STEP 8

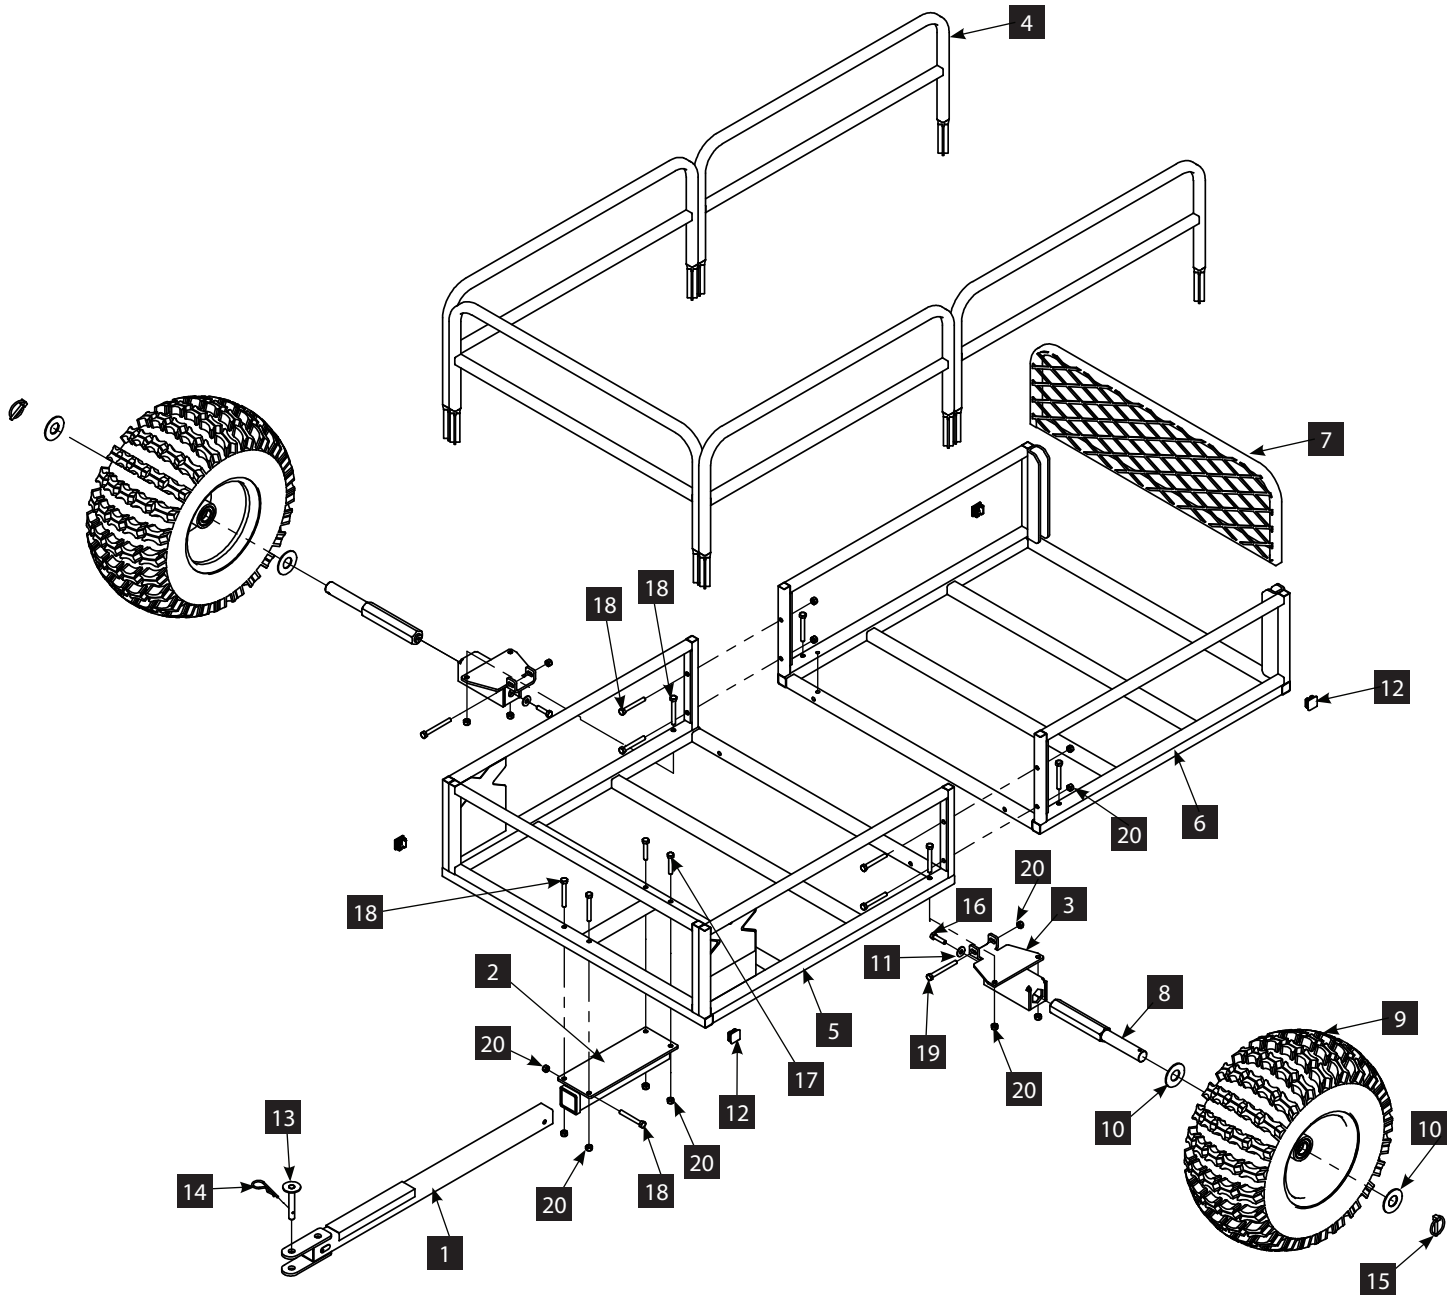
PARTS LIST

ITEM #	PART #	DESCRIPTION	QTY.
1	36315	TRAILER TONGUE	1
2	36318	TONGUE RECEIVER	1
3	36321	SPINDLE BRACKET	2
4	36322	SIDE RAIL	5
5	36328	FRONT TRAILER	1
6	36333	REAR TRAILER	1
7	36336	TAILGATE	1
8	36338	HEX SPINDLE	2
9	36529	ASSEMBLY WHEEL/TIRE 18 X 9.5-8 IN	2
10	36535	WASHER STEEL 25 X 45 X 2.40 MM	4
11	WF516B	WASHER STEEL 5/16 X 7/8 X 5/64 IN	2
12	32783	SQ PLUG 25 MM	4
13	25033	HITCH PIN	1
14	12118	HAIRPIN COTTER PIN 1/8 IN	1
15	37772	LOCK PIN 6 X 40 MM	2
16	1401B	BOLT 5/16 X 1-1/4 IN	2
17	8655B	BOLT 5/16 X 1-3/4 IN	2
18	53730B	BOLT 5/16 X 2-1/2 IN	11
19	29010B	BOLT 5/16 X 3 IN	2
20	60G5NYB	NUT 5/16 IN	15

OPTIONAL ACCESSORIES

PART #	DESCRIPTION
TX113	2" Ball Hitch Kit

ILLUSTRATED PARTS BREAKDOWN





YUTRAX™, A Division of Ardisam, Inc.
1160 Eighth Avenue, PO Box 666
Cumberland, WI 54829

Phone: 800-345-6007
Fax: 715-822-2124
www.yutrax.com

*All weights, specifications and features are approximate and are subject to change without notice. Due to continuous product improvements, product images may not be exact. Warning labels in some product images may have been removed for photography purposes only. Props shown in photos not included. Some assembly may be required.