


*Set up to crank with left hand.

Note tip of pawl on right is engaged (green arrow).

Pawl on left is turned so that the tip is disengaged (blue arrow).

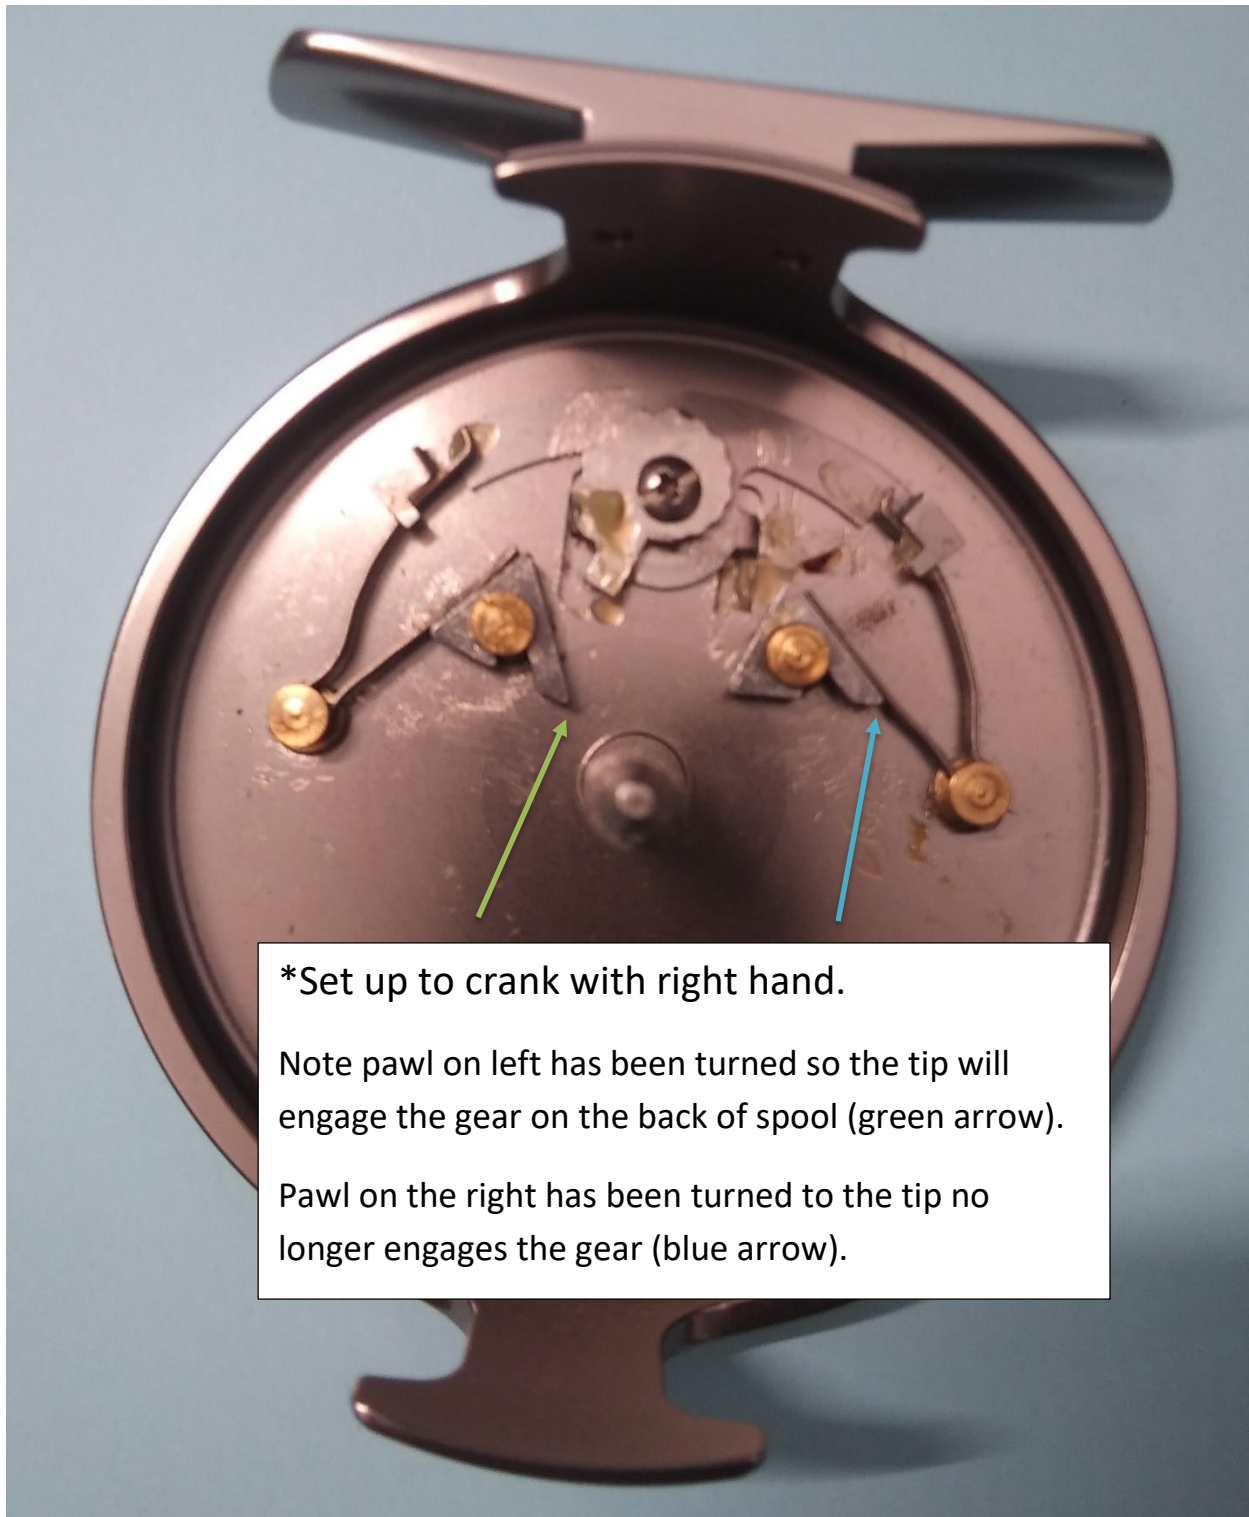

*Set up to crank with right hand.

Note pawl on left has been turned so the tip will engage the gear on the back of spool (green arrow).

Pawl on the right has been turned to the tip no longer engages the gear (blue arrow).